



FR 200 PFF K

Congelatore statico a pozzo vetro piatto scorrevole
Static chest freezer with flat sliding glass lids



FR 300 PFF K

Congelatore statico a pozzo vetro piatto scorrevole
Static chest freezer with flat sliding glass lids



FR 400 PFF K

Congelatore statico a pozzo vetro piatto scorrevole
Static chest freezer with flat sliding glass lids



FR 500 PFF K


Congelatore statico a pozzo vetro piatto scorrevole
Static chest freezer with flat sliding glass lids



Ruote
Rollers



Vetro piatto scorrevole
Flat sliding glass lids

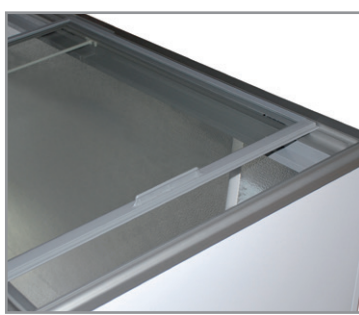


Termometro analogico
Analogue thermometer



Caratteristiche / Features

Modello / Model	FR 200 PFF K	FR 300 PFF K	FR 400 PFF K	FR 500 PFF K
Temperatura / Temperature Range	-23 °C / -13 °C	-23 °C / -13 °C	-23 °C / -13 °C	-23 °C / -13 °C
Classe Climatica / Climate Class	4	4	4	4
Volume Netto-Lordo / Net-Gross Volume	Lt. 168 / 196	Lt. 261 / 303	Lt. 355 / 410	Lt. 436 / 503
Superficie Esterna / Body	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment
Superficie Interna / Inner Liner	Alluminio martellato Embossed Aluminium	Alluminio martellato Embossed Aluminium	Alluminio martellato Embossed Aluminium	Alluminio martellato Embossed Aluminium
Termometro / Thermometer	Analogico / Analogue	Analogico / Analogue	Analogico / Analogue	Analogico / Analogue
Regolatore temperatura / Controller	Meccanico / Mechanical	Meccanico / Mechanical	Meccanico / Mechanical	Meccanico / Mechanical
Spessore isolamento Insulation thickness	mm 60	mm 60	mm 60	mm 60
Sbrinamento / Defrost	Manuale / Manual	Manuale / Manual	Manuale / Manual	Manuale / Manual
Chiave e serratura / Lock and key	Si / Yes	Si / Yes	Si / Yes	Si / Yes
Cestelli / Baskets	Optional	Optional	Optional	Optional
Piedi-Ruote / Feet-Rollers	4 Ruote / 4 Rollers	4 Ruote / 4 Rollers	4 Ruote / 4 Rollers	4 Ruote / 4 Rollers
Peso Netto-Lordo / Net-Gross Weight	Kg 54 / 56	Kg 56 / 63	Kg 66 / 76	Kg 71 / 85
Voltaggio / Voltage	V 220-240	V 220-240	V 220-240	V 220-240
Frequenza / Frequency	Hz 50	Hz 50	Hz 50	Hz 50
Refrigerante / Refrigerant	R290	R290	R290	R290
Assorbimento / Absorption	W 225	W 237	W 256	W 257
Consumo Energia Energy Consumption	KWh/24H 1,90	KWh/24H 3,85	KWh/24H 4,66	KWh/24H 5,36

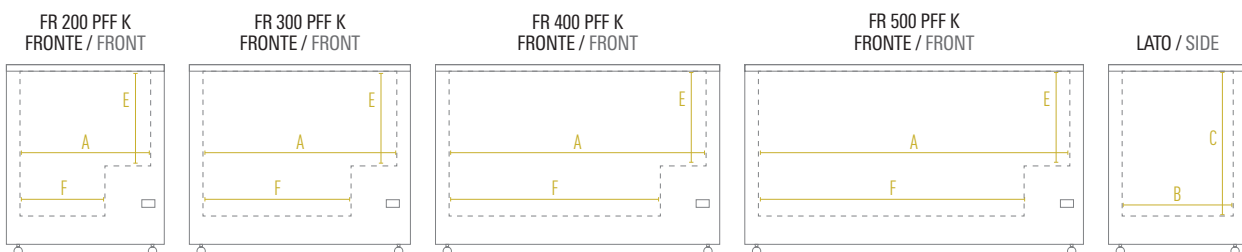
Dimensioni mm / Dimensions mm

Modello / Model	FR 200 PFF K	FR 300 PFF K	FR 400 PFF K	FR 500 PFF K
Dimensioni Esterne (LxPxH) External Dimensions (WxDxH)	725 x 635 x 875	1015 x 635 x 875	1305 x 635 x 875	1555 x 635 x 875
Dimensioni Imballo (LxPxH) Packaging Dimensions (WxDxH)	780 x 695 x 960	1065 x 695 x 960	1355 x 695 x 960	1605 x 695 x 960

Dimensioni Interne mm / Inner Dimensions mm

A - Larghezza / Width	600	890	1180	1430
B - Profondità / Depth	510	510	510	510
C - Altezza / Height	665	665	665	665
E - Altezza Minima / Min. Height	435	435	435	435
F - Larghezza Minima / Min. Width	390	680	970	1220

Dimensioni Personalizzazione (LxH) mm / Sticker Dimensions (WxH) mm

Lato destro / Right side	625 x 487	625 x 487	625 x 487	625 x 487
Lato sinistro / Left side	625 x 750	625 x 750	625 x 750	625 x 750
Frontale / Front	715 x 750	1005 x 750	1295 x 750	1545 x 750