




FR 152 PAC / PAF

Congelatore statico a pozzo
 vetro curvo scorrevole / vetro piatto inclinato
 Static chest freezer

with curved sliding glass lids / with sloped flat sliding glass lids



FR 200 PAC / PAF

Congelatore statico a pozzo
 vetro curvo scorrevole / vetro piatto inclinato
 Static chest freezer

with curved sliding glass lids / with sloped flat sliding glass lids



FR 300 PAC / PAF

Congelatore statico a pozzo
 vetro curvo scorrevole / vetro piatto inclinato
 Static chest freezer

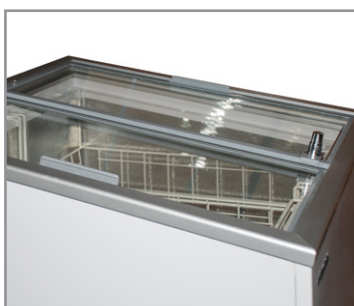
with curved sliding glass lids / with sloped flat sliding glass lids



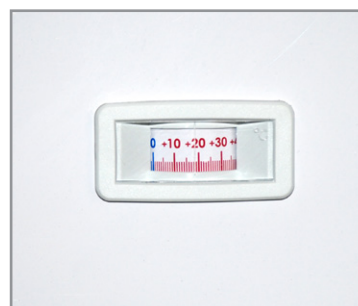
Cestelli - **Optional**
 Baskets - **Optional**



Versione PAF vetro piatto inclinato
 PAF version with sloped flat sliding glass lids






Termometro analogico
 Analogue thermometer




Caratteristiche / Features

Modello / Model	FR 152 PAC / PAF	FR 200 PAC / PAF	FR 300 PAC / PAF
Temperatura / Temperature Range	-13 °C / -23 °C	-13 °C / -23 °C	-13 °C / -23 °C
Classe Climatica / Climate Class	4	4	4
Volume Netto-Lordo / Net-Gross Volume	Lt. 115 / 137	Lt. 158 / 187	Lt. 248 / 290
Superficie Esterna / Body	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment
Superficie Interna / Inner Liner	Alluminio martellato Embossed Aluminium	Alluminio martellato Embossed Aluminium	Alluminio martellato Embossed Aluminium
Termometro / Thermometer	Analogico / Analogue	Analogico / Analogue	Analogico / Analogue
Regolatore temperatura / Controller	Meccanico / Mechanical	Meccanico / Mechanical	Meccanico / Mechanical
Spessore isolamento / Insulation thickness	mm 60	mm 60	mm 60
Sbrinamento / Defrost	Manuale / Manual	Manuale / Manual	Manuale / Manual
Chiave e serratura / Lock and key	Si / Yes	Si / Yes	Si / Yes
Cestelli / Baskets	Optional	Optional	Optional
Piedi-Ruote / Feet-Rollers	4 Ruote / 4 Rollers	4 Ruote / 4 Rollers	4 Ruote / 4 Rollers
Peso Netto-Lordo / Net-Gross Weight	Kg 44 / 48	Kg 49 / 54	Kg 58 / 65
Voltaggio / Voltage	V 220-240	V 220-240	V 220-240
Frequenza / Frequency	Hz 50	Hz 50	Hz 50
Refrigerante / Refrigerant	R290	R290	R290
Assorbimento / Absorption	W 200	W 225	W 237
Consumo Energia / Energy Consumption	KwH/24H 2,68	KwH/24H 2,3	KwH/24H 3,4

 FR 152 PAC / PAF
FRONTE / FRONT

 FR 200 PAC / PAF
FRONTE / FRONT

 FR 300 PAC / PAF
FRONTE / FRONT


LATO / SIDE


Dimensioni mm / Dimensions mm

Modello / Model	FR 152 PAC / PAF	FR 200 PAC / PAF	FR 300 PAC / PAF
Dimensioni Esterne (LxPxH) External Dimensions (WxDxH)	585 x 635 x 890	725 x 635 x 875	1015 x 635 x 875
Dimensioni Imballo (LxPxH) Packaging Dimensions (WxDxH)	640 x 695 x 920	770 x 695 x 920	1065 x 695 x 920

Dimensioni Interne mm / Inner Dimensions mm

A - Larghezza / Width	460	600	890
B - Profondità / Depth	510	510	510
C - Altezza / Height	560	560	560
E - Altezza Minima / Min. Height	330	330	330
F - Larghezza Minima / Min. Width	250	390	680

Dimensioni Personalizzazione (LxH) mm / Sticker Dimensions (WxH) mm

Lato destro / Right side	625 x 500 / 395	625 x 492 / 379	625 x 492 / 379
Lato sinistro / Left side	625 x 766 / 658	625 x 750 / 638	625 x 750 / 638
Frontale / Front	575 x 661	715 x 643	1005 x 643