



**FR 300 PSSL**

Congelatore statico a pozzo porta cieca scorrevole  
Static chest freezer with solid sliding lids



**FR 400 PSSL**

Congelatore statico a pozzo porta cieca scorrevole  
Static chest freezer with solid sliding lids



**FR 500 PSSL**

Congelatore statico a pozzo porta cieca scorrevole  
Static chest freezer with solid sliding lids



Porte scorrevoli  
Sliding doors



Chiave e serratura  
Lock and key

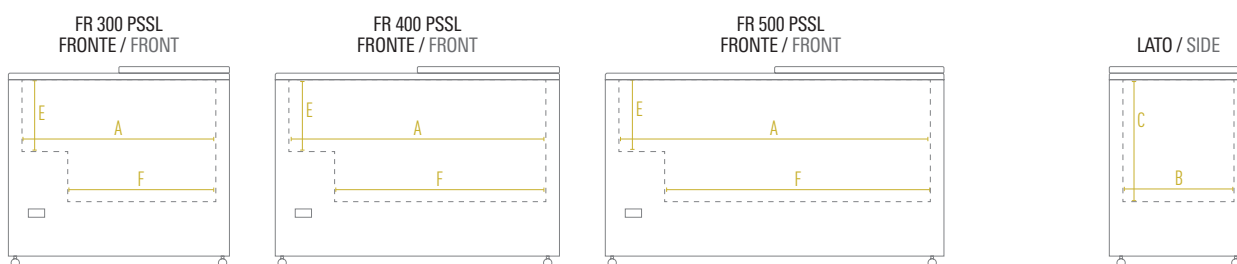


Ruote  
Rollers



**Caratteristiche / Features**

Modello / Model	FR 300 PSSL	FR 400 PSSL	FR 500 PSSL
Temperatura / Temperature Range	-15 °C / -23 °C	-15 °C / -23 °C	-15 °C / -23 °C
Classe Climatica / Climate Class	4	4	4
Volume Netto-Lordo / Net-Gross Volume	Lt. 261 / 303	Lt. 355 / 410	Lt. 436 / 503
Superficie Esterna / Body	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment
Superficie Interna / Inner Liner	Alluminio martellato Embossed Aluminium	Alluminio martellato Embossed Aluminium	Alluminio martellato Embossed Aluminium
Termometro / Thermometer	Analogico / Analogue	Analogico / Analogue	Analogico / Analogue
Regolatore temperatura / Controller	Meccanico / Mechanical	Meccanico / Mechanical	Meccanico / Mechanical
Spessore isolamento / Insulation thickness	mm 70	mm 70	mm 70
Sbrinamento / Defrost	Manuale / Manual	Manuale / Manual	Manuale / Manual
Chiave e serratura / Lock and key	Si / Yes	Si / Yes	Si / Yes
Piedi-Ruote / Feet-Rollers	4 Ruote / 4 Rollers	4 Ruote / 4 Rollers	4 Ruote / 4 Rollers
Peso Netto-Lordo / Net-Gross Weight	Kg 58 / 63	Kg 70 / 76	Kg 78 / 85
Voltaggio / Voltage	V 220-240	V 220-240	V 220-240
Frequenza / Frequency	Hz 50	Hz 50	Hz 50
Refrigerante / Refrigerant	R600A	R290	R290
Assorbimento / Absorption	W 193	W 257	W 285
Consumo Energia / Energy Consumption	KwH/24H 3,4	KwH/24H 4,2	KwH/24H 4,8


**Dimensioni mm / Dimensions mm**

Modello / Model	FR 300 PSSL	FR 400 PSSL	FR 500 PSSL
Dimensioni Esterne (LxPxH) External Dimensions (WxDxH)	1015 x 635 x 920	1305 x 635 x 920	1555 x 635 x 920
Dimensioni Imballo (LxPxH) Packaging Dimensions (WxDxH)	1065 x 695 x 960	1355 x 695 x 960	1605 x 695 x 960

**Dimensioni Interne mm / Inner Dimensions mm**

A - Larghezza / Width	890	1180	1430
B - Profondità / Depth	510	510	510
C - Altezza / Height	560	665	665
E - Altezza Minima / Min. Height	330	435	435
F - Larghezza Minima / Min. Width	680	970	1220

**Dimensioni Personalizzazione (LxH) mm / Sticker Dimensions (WxH) mm**

Lato destro / Right side	625 x 507	625 x 507	625 x 507
Lato sinistro / Left side	625 x 770	625 x 770	625 x 770
Frontale / Front	1005 x 770	1295 x 770	1545 x 770