



**MILANO 1620 BLK/WHT**

Armadio murale tre porte ventilato  
 Temperatura normale  
 Ventilated three door multideck cooler  
 Positive temperature



**Colori disponibili / Available colors**

<input type="radio"/>	Bianco / White
<input type="radio"/>	Nero / Black



SMART LINK WIFI



**MILANO 1910 BLK/WHT**

Armadio murale quattro porte ventilato  
 Temperatura normale  
 Ventilated four door multideck cooler  
 Positive temperature



**Colori disponibili / Available colors**

<input type="radio"/>	Bianco / White
<input type="radio"/>	Nero / Black



Porta a sfioro senza cornice  
 Full glass frameless door



Termostato elettronico  
 Electronic thermostat

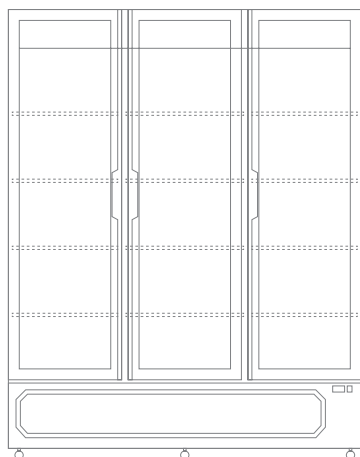
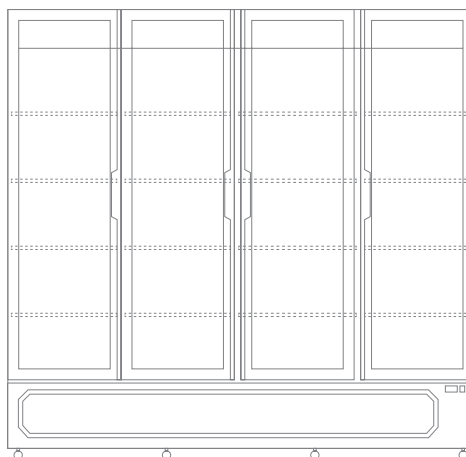
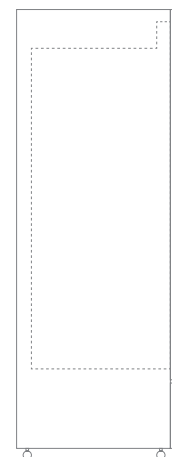


Illuminazione led  
 Led lighting



**Caratteristiche / Features**

Modello / Model	MILANO 1620 BLK/WHT	MILANO 1910 BLK/WHT
Temperatura / Temperature Range	+1 °C / +10 °C	-1 °C / +4 °C
Classe Climatica / Climate Class	4	4
Volume Netto-Lordo / Net-Gross Volume	Lt. 1420 / 1560	Lt. 1630 / 1850
Superficie Esterna / Body	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment
Superficie Interna / Inner Liner	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment
Termostato / Thermostat	Elektronico / Electronic	Elektronico / Electronic
Smart Link WiFi	Optional	Optional
Controllo remoto / Remote controller		
Spessore isolamento / Insulation thickness	mm 45	mm 45
Sbrinamento / Defrost	Automatico a fermo compressore Automatic compressor cycle	Automatico a fermo compressore Automatic compressor cycle
Illuminazione / Lighting	4 Led verticali / vertical	4 Led verticali / vertical
Chiusura automatica porta / Self closing door	Si / Yes	Si / Yes
Mensole (LxP) / Shelves (WxD)	N° 8 - mm 484 x 543 lat / lateral N° 4 - mm 540 x 543 cen / middle	N° 12 - mm 425 x 543
Piedi-Ruote / Feet-Rollers	6 Ruote / 6 Rollers 3 Piedini / 3 Feet	6 Ruote / 6 Rollers 4 Piedini / 4 Feet
Peso Netto-Lordo / Net Weight	Kg 265 / 280	Kg 310 / 320
Voltaggio / Voltage	V 220-240	V 220-240
Frequenza / Frequency	Hz 50	Hz 50
Refrigerante / Refrigerant	R290	R290
Assorbimento / Absorption	W 504	W 825
Consumo Energia / Energy Consumption	Kwh/24H 9,21	Kwh/24H 9,4

**MILANO 1620 FRONTE / FRONT**

**MILANO 1910 FRONTE / FRONT**

**LATO / SIDE**

**Dimensioni mm / Dimensions mm**

Modello / Model	MILANO 1620 BLK/WHT	MILANO 1910 BLK/WHT
Dimensioni Esterne (LxPxH) / External Dimensions (WxDxH)	1620 x 740 x 2065	1910 x 790 x 2140
Dimensioni Imballo (LxPxH) / Packaging Dimensions (WxDxH)	1630 x 778 x 2152	1920 x 800 x 2280

**Dimensioni Interne mm / Inner Dimensions mm**

A - Larghezza / Width	1534	1824
B - Profondità / Depth	638	636
C - Altezza / Height	1594	1594

**Dimensioni Personalizzazione (LxH) mm / Sticker Dimensions (WxH) mm**

Lato / Side	674 x 2006	674 x 2006
Vetro / Glass	424 x 1694	371 x 1694