



MILANO 630 BLK

Armadio murale statico con agitatore
 Temperatura normale
 Static-fan assisted multideck cooler
 Positive temperature



MILANO 630 BT BLK

Armadio murale no frost
 Bassa temperatura
 No frost multideck freezer
 Negative temperature

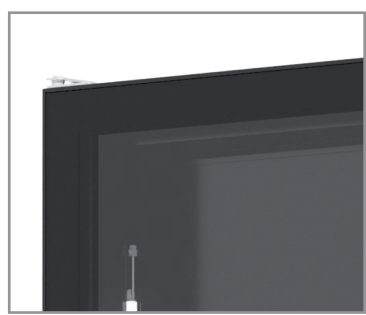


MILANO 1270 BLK

Armadio murale doppia porta ventilato
 Temperatura normale
 Ventilated double door multideck cooler
 Positive temperature



Porta a sfioro senza cornice
 Full glass frameless door



Termostato elettronico
 Electronic thermostat

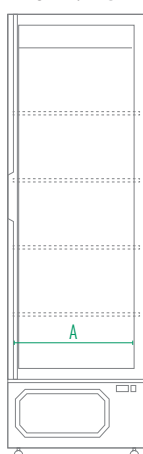
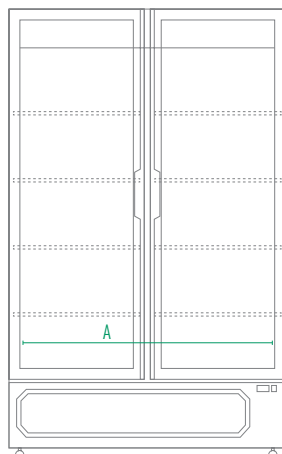
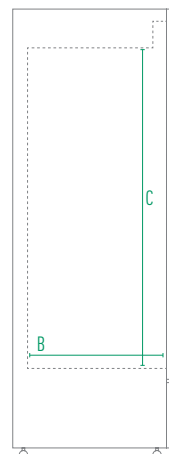


Illuminazione led
 Led lighting



Caratteristiche / Features

Modello / Model	MILANO 630 BLK	MILANO 1270 BLK	MILANO 630 BT BLK
Temperatura / Temperature Range	+1 °C / +10 °C	+1 °C / +10 °C	-23 °C / -18 °C
Classe Climatica / Climate Class	4	4	3
Volume Netto-Lordo / Net-Gross Volume	Lt. 527 / 551	Lt. 1095 / 1215	Lt. 500 / 550
Superficie Esterna / Body	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment
Superficie Interna / Inner Liner	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment
Termostato / Thermostat	Elektronico / Electronic	Elektronico / Electronic	Elektronico / Electronic
Smart Link WiFi	Optional	Optional	Optional
Controllo remoto / Remote control			
Spessore isolamento / Insulation thickness	mm 45	mm 45	mm 61
Sbrinamento / Defrost	Automatico a fermo compressore Automatic compressor cycle	Automatico a fermo compressore Automatic compressor cycle	Automatico a gas caldo + Manuale Automatic with hot gas system + Manual
Illuminazione / Lighting	2 Led verticali / vertical	3 Led verticali / vertical	2 Led verticali / vertical
Chiusura automatica porta / Self closing door	Si / Yes	Si / Yes	Si / Yes
Mensole (LxP) / Shelves (WxD)	N° 4 - mm 529 x 543	N° 8 - mm 580 x 543	N° 4 - mm 529 x 541
Piedi-Ruote / Feet-Rollers	4 Ruote / 4 Rollers 2 Piedini / 2 Feet	4 Ruote / 4 Rollers 2 Piedini / 2 Feet	4 Ruote / 4 Rollers 2 Piedini / 2 Feet
Peso Netto-Lordo / Net Weight	Kg 89 / 101	Kg 205 / 220	Kg 144 / 160
Voltaggio / Voltage	V 220-240	V 220-240	V 220-240
Frequenza / Frequency	Hz 50	Hz 50	Hz 50 Standard / Hz 60 Optional
Refrigerante / Refrigerant	R290	R290	R290
Assorbimento / Absorption	W 130	W 300	W 680
Consumo Energia / Energy Consumption	KwH/24H 3,8	KwH/24H 5,2	KwH/24H 12,6

MILANO 630
FRONTE / FRONT

MILANO 1270
FRONTE / FRONT

LATO / SIDE

Dimensioni mm / Dimensions mm

Modello / Model	MILANO 630 BLK	MILANO 1270 BLK	MILANO 630 BT BLK
Dimensioni Esterne (LxPxH) / External Dimensions (WxDxH)	625 x 785 x 2040	1270 x 740 x 2040	665 x 800 x 2040
Dimensioni Imballo (LxPxH) / Packaging Dimensions (WxDxH)	670 x 870 x 2230	1280 x 800 x 2230	760 x 870 x 2230

Dimensioni Interne mm / Inner Dimensions mm

A - Larghezza / Width	544	1184	544
B - Profondità / Depth	638	638	636
C - Altezza / Height	1594	1594	1594

Dimensioni Personalizzazione (LxH) mm / Sticker Dimensions (WxH) mm

Lato / Side	674 x 2006	674 x 2006	691 x 2006
Vetro / Glass	517 x 1595	517 x 1595	557 x 1602