



Porte e Griglia
Door and inferior grid
● RAL7042



MR 126 BT2 BLK/WHT

Armadio murale doppia porta no frost
Bassa temperatura
No frost double door multideck freezer
Negative temperature



Colori disponibili / Available colors

- **BLK** - Interno/Esterno
Inner liner/Body
- **WHT** - Interno/Esterno
Inner liner/Body

MR 75 BT1 BLK/WHT

Armadio murale no frost
Bassa temperatura
No frost multideck freezer
Negative temperature



Colori disponibili / Available colors

- **BLK** - Interno/Esterno
Inner liner/Body
- **WHT** - Interno/Esterno
Inner liner/Body



MR 188 BT3 BLK/WHT

Armadio murale tre porte no frost
Bassa temperatura
No frost three door multideck freezer
Negative temperature



Colori disponibili / Available colors

- **BLK** - Interno/Esterno
Inner liner/Body
- **WHT** - Interno/Esterno
Inner liner/Body

Motoventola assiale
Axial fan motor



Termostato elettronico
Electronic thermostat

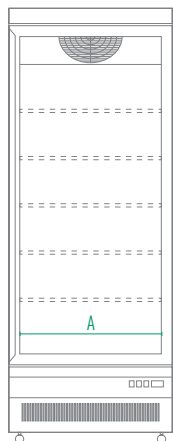
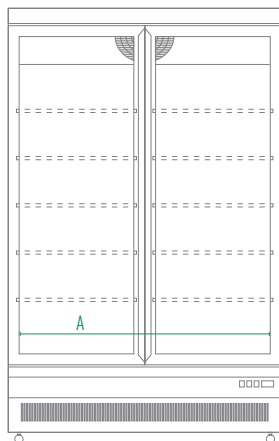
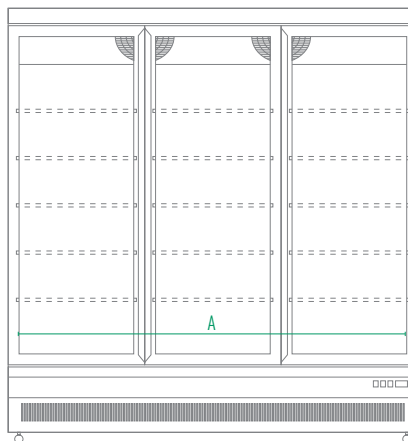
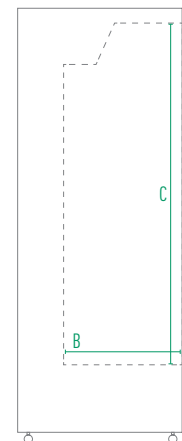


Mensole
Shelves



Caratteristiche / Features

Modello / Model	MR 75 BT1 BLK/WHT	MR 126 BT2 BLK/WHT	MR 188 BT3 BLK/WHT
Temperatura / Temperature Range	-18 °C / -22 °C	-18 °C / -22 °C	-18 °C / -22 °C
Classe Climatica / Climate Class	3	3	3
Volume Netto-Lordo / Net-Gross Volume	Lt. 425 / 560	Lt. 780 / 930	Lt. 1200 / 1450
Superficie Esterna / Body	Acciaio verniciato Painted steel	Acciaio verniciato Painted steel	Acciaio verniciato Painted steel
Superficie Interna / Inner Liner	Alluminio verniciato Painted aluminium	Alluminio verniciato Painted aluminium	Alluminio verniciato Painted aluminium
Termostato / Thermostat	Elettronico / Electronic	Elettronico / Electronic	Elettronico / Electronic
Smart Link WiFi Controllo remoto / Remote controller	Optional	Optional	Optional
Spessore isolamento / Insulation thickness	mm 60	mm 60	mm 60
Sbrinamento / Defrost	Automatico a gas caldo + Manuale Automatic with hot gas system + Manual	Automatico a gas caldo + Manuale Automatic with hot gas system + Manual	Automatico a gas caldo + Manuale Automatic with hot gas system + Manual
Illuminazione / Lighting	2 Led verticali / Vertical	3 Led verticali / Vertical	3 Led verticali / Vertical
Chiusura automatica porta / Self closing door	Si / Yes	Si / Yes	Si / Yes
Mensole (LxP) / Shelves (WxD)	N° 5 - mm 610 x 473	N° 10 - mm 551 x 473	N° 10 - mm 551 x 473 laterale / lateral N° 5 - mm 624 x 473 centrale / middle
Piedi-Ruote / Feet-Rollers	4 Ruote / 4 Rollers	4 Ruote / 4 Rollers	8 Ruote / 8 Rollers
Peso Netto-Lordo / Net Weight	Kg 150 / 158,5	Kg 240 / 270	Kg 305 / 355
Voltaggio / Voltage	V 220-240	V 220-240	V 220-240
Frequenza / Frequency	Hz 50	Hz 50	Hz 50
Refrigerante / Refrigerant	R290	R290	R290
Assorbimento / Absorption	W 787	W 1517	W 1752
Consumo Energia / Energy Consumption	KwH/24H 13,30	KwH/24H 24,34	KwH/24H 35,20

**MR 75 BT1
FRONTE / FRONT**

**MR 126 BT2
FRONTE / FRONT**

**MR 188 BT3
FRONTE / FRONT**

LATO / SIDE

Dimensioni mm / Dimensions mm

Modello / Model	MR 75 BT1 BLK/WHT	MR 126 BT2 BLK/WHT	MR 188 BT3 BLK/WHT
Dimensioni Esterne (LxPxH) External Dimensions (WxDxH)	750 x 760 x 1997	1253 x 760 x 1997	1880 x 760 x 1997
Dimensioni Imballo (LxPxH) Packaging Dimensions (WxDxH)	775 x 780 x 2090	1278 x 780 x 2090	1905 x 780 x 2090

Dimensioni Interne mm / Inner Dimensions mm

A - Larghezza / Width	630	1133	1760
B - Profondità / Depth	580	530	530
C - Altezza / Height	1538	1554	1554