


ARMADI MURALI REFRIGERATI

MULTIDECK COOLERS




OPEN 400

Vetrina refrigerata ventilata.
Ventilated refrigerated cooler




Termostato elettronico
Electronic thermostat

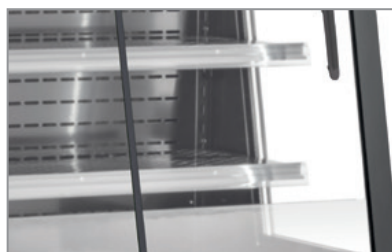

Mensole regolabili e inclinabili
Adjustable and tiltable shelves



Superficie interna in acciaio AISI 304
AISI 304 Stainless steel inner liner

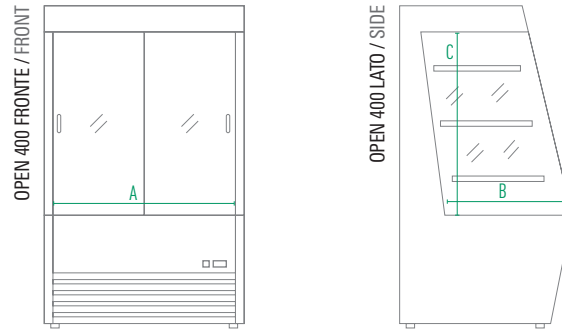

Dimensioni mm / Dimensions mm	OPEN 400
Dimensioni Esterne (LxPxH) / External Dimensions (WxDxH)	918 x 792 x 1459
Dimensioni Imballo (LxPxH) / Packaging Dimensions (WxDxH)	1010 x 940 x 1685
A - Larghezza / Width	865
B - Profondità / Depth	560
C - Altezza / Height	800

Caratteristiche Tecniche / Technical Features	OPEN 400
Temperatura / Temperature Range	+2 °C / +10 °C
Classe Climatica / Climate Class	6
Volume Netto-Lordo / Net-Gross Volume	Lt. 270 / 320
Superficie Esterna / Body	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment
Superficie Interna / Inner Liner	Acciaio AISI 304 / AISI 304 Stainless steel
Termostato / Thermostat	Elettronico / Electronic
Smart Link WiFi Controllo remoto / Remote controller	Si
Spessore isolamento / Insulation thickness	40 mm
Sbrinamento / Defrost	Automatico / Automatic
Illuminazione / Lighting	2 led
Mensole (LxP) / Shelves (WxD)	N° 3 - (Superiore 830 x 295 mm / Media e Inferiore 830 x 345 mm) N° 3 - (Upper 830 x 295 mm / Middle and Bottom 830 x 345 mm)
Piedi-Ruote / Feet-Rollers	4 Piedi (2 con freni) / 4 Feet (2 with brakes)
Peso Netto-Lordo / Net-Gross Weight	130,5 / 181,5
Voltaggio / Voltage	V 220-240
Frequenza / Frequency	Hz 50
Refrigerante / Refrigerant	R290
Assorbimento / Absorption	W 1200
Consumo Energia / Energy Consumption	KwH/24H 6,739